



Last information update: August 2025

Product configuration: QG34

QG34: Ø 225 mm - neutral white - DALI

**Product code**

QG34: Ø 225 mm - neutral white - DALI

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in neutral white colour tone (4000K). Wall-washer light emission.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.03


Mounting

ceiling surface

Wiring


product complete with DALI components

Complies with EN60598-1 and pertinent regulations

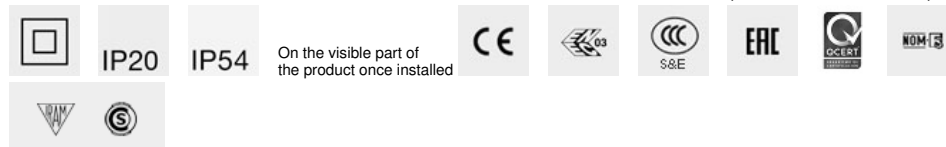**Technical data**

lm system:	2988	Colour temperature [K]:	4000
W system:	25.3	MacAdam Step:	2
lm source:	3600	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (lm/W, real value):	118.1	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	80		

Polar

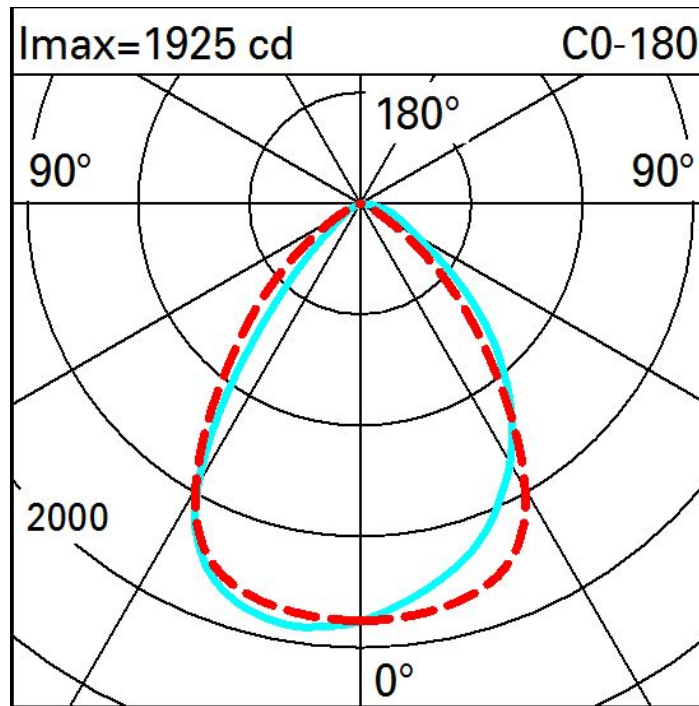

Illuminances

Lux												Wall distance = 1m											
3																							
	1	3	9	28	96	158	96	28	9	3	1												
2	2	6	18	68	190	282	190	68	18	6	2												
	4	13	39	96	175	219	175	96	39	13	4												
1	9	21	44	81	119	136	119	81	44	21	9												
	12	23	40	59	76	84	76	59	40	23	12												
0																							
	m	-2	-1		0		1	2	3														