

Pixel Pro


Design Iosa Ghini

iGuzzini

Last information update: May 2024

Product configuration: MP08

MP08: recessed luminaire Ø 205 - neutral white passive dissipation LED - integrated DALI control gear - flood



Product code

MP08: recessed luminaire Ø 205 - neutral white passive dissipation LED - integrated DALI control gear - flood **Attention! Code no longer in production**

Technical description

recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Structure with die-cast aluminium frame and main body; shaped surface with high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Steel rotation hinge, chrome-plated aluminium body closing ring. High performance reflector made of super-pure aluminium - flood beam angle. Body adjusted using manually operated device: internal 30° - external 75° - rotation about axis 355°. Supplied with DALI dimmable control gear connected to the luminaire. Neutral white high efficiency LED.

Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 195

Colour

White / Aluminium (39) | Grey/Aluminium (78)

Weight (Kg)

2.22

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	4096	CRI:	80
W system:	34.2	Colour temperature [K]:	4000
lm source:	5000	MacAdam Step:	2
W source:	31	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	119.8	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	1
Beam angle [°]:	36°	Control:	DALI


Polar

Imax=9459 cd		CIE		Lux			
	90°	nL 0.82	99-100-100-100-82	h	d	Em	Emax
	180°	UGR 16.4-16.4	DIN A 61	2	1.3	1838	2365
	90°	UTE 0.82A+0.00T	F*1=986	4	2.6	459	591
	0°	F*1+F*2=998	F*1+F*2+F*3=1000	6	3.9	204	263
	α=36°	CIBSE LG3 L<3000 cd/m² at 65°	UGR<19 L<3000 cd/mq @ 65°	8	5.2	115	148

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	66	66	63	77
1.0	77	73	71	69	73	70	70	67	82
1.5	81	78	76	74	77	75	75	72	88
2.0	83	81	80	79	80	79	78	76	92
2.5	85	83	82	81	82	81	80	78	95
3.0	86	85	84	83	84	83	82	80	97
4.0	87	86	86	85	85	84	83	81	99
5.0	87	87	86	86	86	85	84	82	100

Luminance curve limit

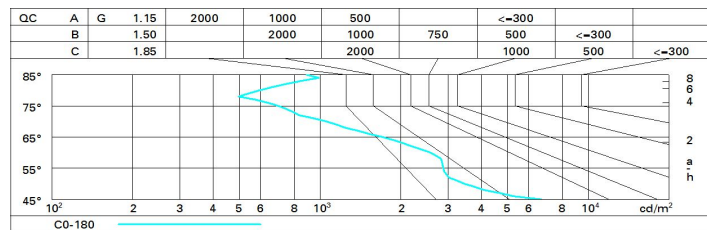

UGR diagram

Corrected UGR values (at 5000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.0	17.6	17.3	17.8	18.1	17.0	17.6	17.3	17.8	18.1
	3H	16.9	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	4H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6	17.9
	6H	16.7	17.2	17.1	17.5	17.8	16.7	17.2	17.1	17.5	17.8
	8H	16.7	17.1	17.0	17.5	17.8	16.7	17.1	17.0	17.5	17.8
	12H	16.6	17.1	17.0	17.4	17.8	16.6	17.1	17.0	17.4	17.8
4H	2H	16.8	17.3	17.1	17.6	17.9	16.8	17.3	17.1	17.6	17.9
	3H	16.6	17.1	17.0	17.4	17.8	16.6	17.1	17.0	17.4	17.8
	4H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	6H	16.5	16.8	16.9	17.2	17.6	16.5	16.8	16.9	17.2	17.6
	8H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6
	12H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
8H	4H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6
	6H	16.3	16.6	16.8	17.0	17.5	16.3	16.6	16.8	17.0	17.5
	8H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	12H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
12H	4H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
	6H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	8H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
Variations with the observer position at spacing:											
S =	1.0H	5.8 / -12.5					5.8 / -12.5				
	1.5H	8.6 / -13.5					8.6 / -13.5				
	2.0H	10.6 / -15.2					10.6 / -15.2				