


Last information update: February 2025

**Product configuration: QD72**

QD72: Recessed Frame section 10 LEDs - Tunable White - Wall Washer Longitudinal Glare Control



**Product code**

QD72: Recessed Frame section 10 LEDs - Tunable White - Wall Washer Longitudinal Glare Control

**Technical description**

Linear recessed miniaturised luminaire. Using LED lamps with a high colour rendering index and a different colour temperature allows dynamic light modulation to be obtained. The variation is achieved by mixing an emission of 5 x 2700K LEDs and 5 x 5700K LEDs. The colour temperature remains uniform and constant even when different size products are used together and with an uneven number of warm and cold LEDs. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient and homogeneous effect on walls from top to bottom and avoids shadow zones near the ceiling. The black polycarbonate perimeter frame is designed to significantly reduce the effect of longitudinal glare. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Flux enhancer - superpure aluminium reflector - asymmetrical textured PMMA screen. The product is designed to be used together with codes 6170 + M630 to obtain a solution suitable for small to medium systems that can be programmed with a DALI protocol via a simple and intuitive user touch-panel. Other management systems are also available with a separate code for larger systems that require the intervention of a specialised technician to programme them: the MH97 + MH93 + MI02 group offers a DALI / KNX programmable solution, and the MH97 + MH93 + M618 group allows the system management to be extended to remote devices like tablet and smartphones too.

**Installation**

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 186. To light walls correctly check the installation distances and centre-to-centre distances indicated on the instructions sheet.

**Colour**

Black / Black (43) | Black / White (47) | Grey / Black (74)\*

**Weight (Kg)**

0.68

\* Colours on request


**Mounting**

ceiling recessed

**Wiring**

DALI control gear units included. Different management systems are available with a separate code. For technical data, properties and connection modes see the instruction sheet.


Complies with EN60598-1 and pertinent regulations

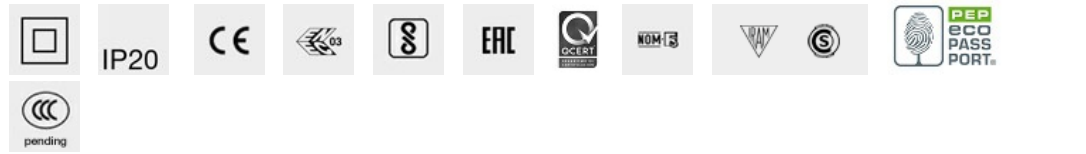

**Technical data**

lm system:	496	CRI (minimum):	90
W system:	18.9	Colour temperature [K]:	Tunable white 2700 - 5700
lm source:	1550	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	15	Lamp code:	LED
Luminous efficiency (lm/W, real value):	26.2	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	32	Control:	DALI-2

Polar

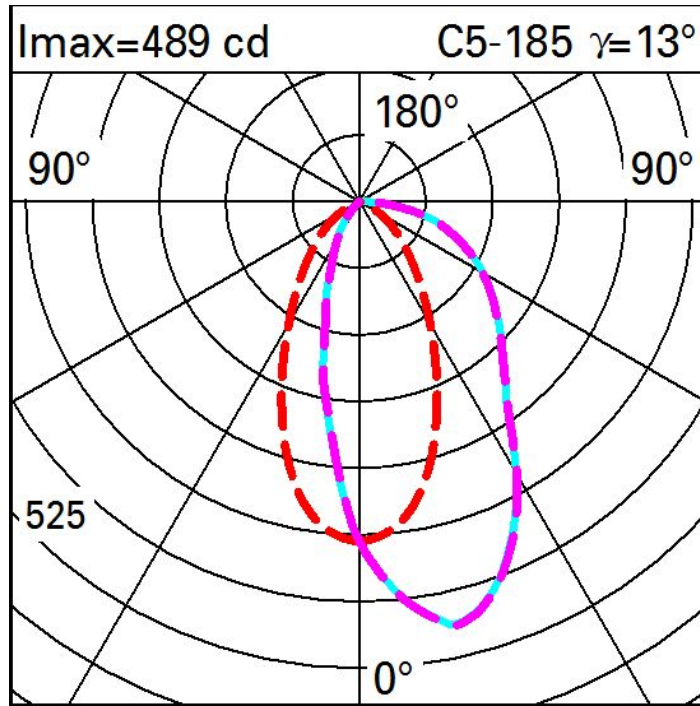

Illuminances

Lux Wall distance = 1m

3						●					
	0.3	0.8	3	13	51	102	51	13	3	0.8	0.3
2	0.7	2	7	20	52	83	52	20	7	2	0.7
	1	3	8	19	39	54	39	19	8	3	1
1	2	4	8	16	29	37	29	16	8	4	2
	2	4	7	13	20	24	20	13	7	4	2
0											
	m	-2	-1	0	1	2	3				