



Last information update: December 2024

**Product configuration: Q476**

Q476: Frame 4 cells - Flood beam - LED



**Product code**

Q476: Frame 4 cells - Flood beam - LED

**Technical description**

Square miniaturised recessed luminaire with 4 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Ballast not included, available with separate code.

**Installation**

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 42 x 42.

**Colour**

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | Grey / Black (74)\* | White / burnished chrome (E7)\*

**Weight (Kg)**

0.11

\* Colours on request

**Mounting**

wall recessed|ceiling recessed

**Wiring**

Direct current ballasts to be ordered separately: ON-OFF - code no. MXF9 (min 1 / max 2); dimmable DALI - code no. BZM4 (min 1 / max 5) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

Complies with EN60598-1 and pertinent regulations



**Technical data**

Im system:	584	CRI (minimum):	90
W system:	7.9	Colour temperature [K]:	3000
Im source:	730	MacAdam Step:	2
W source:	7.9	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	73.9	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	42°	LED current [mA]:	700


**Polar**

<p>Imax=1227 cd α=42°</p>	<p><b>CIE</b> nL 0.80 100-100-100-100-80 UGR &lt;10-&lt;10 <b>DIN</b> A.61 <b>UTE</b> 0.80A+0.00T F*1=997 F*1+F*2=999 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L&lt;1500 cd/m<sup>2</sup> at 65° UGR&lt;10   L&lt;1500 cd/mq @65°</p>	<b>Lux</b>			
		h	d	Em	E <sub>max</sub>
		1	0.8	977	1222
		2	1.5	244	306
		3	2.3	109	136
4	3.1	61	76		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	82	80	78	77	79	77	76	74	93
2.5	83	82	81	80	81	80	79	77	96
3.0	84	83	82	82	82	81	80	78	98
4.0	85	84	84	83	83	83	81	79	99
5.0	86	85	85	84	84	83	82	80	100

Luminance curve limit

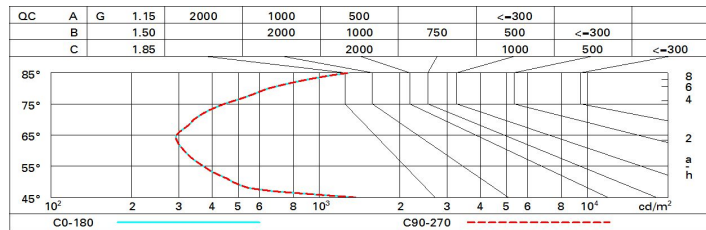

UGR diagram

Corrected UGR values (at 730 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.8	8.4	8.1	8.7	8.9	7.8	8.4	8.1	8.7	8.9
	3H	7.7	8.2	8.0	8.5	8.8	7.7	8.2	8.0	8.5	8.8
	4H	7.7	8.1	8.0	8.4	8.7	7.6	8.1	8.0	8.4	8.7
	6H	7.6	8.0	7.9	8.4	8.7	7.6	8.0	7.9	8.3	8.6
	8H	7.6	8.0	7.9	8.3	8.7	7.5	8.0	7.9	8.3	8.6
12H	7.6	8.0	7.9	8.3	8.7	7.5	7.9	7.9	8.2	8.6	
4H	2H	7.6	8.1	8.0	8.4	8.7	7.7	8.1	8.0	8.4	8.7
	3H	7.5	7.9	7.9	8.2	8.6	7.5	7.9	7.9	8.3	8.6
	4H	7.4	7.8	7.8	8.2	8.5	7.4	7.8	7.8	8.2	8.5
	6H	7.4	7.7	7.8	8.1	8.5	7.3	7.7	7.8	8.1	8.5
	8H	7.4	7.6	7.8	8.1	8.5	7.3	7.6	7.7	8.0	8.4
12H	7.4	7.6	7.8	8.0	8.5	7.3	7.5	7.7	7.9	8.4	
8H	4H	7.3	7.6	7.7	8.0	8.4	7.4	7.6	7.8	8.1	8.5
	6H	7.3	7.5	7.7	7.9	8.4	7.3	7.5	7.8	8.0	8.4
	8H	7.2	7.5	7.7	7.9	8.4	7.2	7.5	7.7	7.9	8.4
	12H	7.3	7.5	7.8	7.9	8.5	7.2	7.4	7.7	7.9	8.4
12H	4H	7.3	7.5	7.7	7.9	8.4	7.4	7.6	7.8	8.0	8.5
	6H	7.2	7.4	7.7	7.9	8.4	7.3	7.5	7.8	8.0	8.5
	8H	7.2	7.4	7.7	7.9	8.4	7.3	7.5	7.8	7.9	8.5
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -8.9					6.7 / -8.9				
	1.5H	9.5 / -9.1					9.5 / -9.1				
	2.0H	11.5 / -9.3					11.5 / -9.3				