


Polare

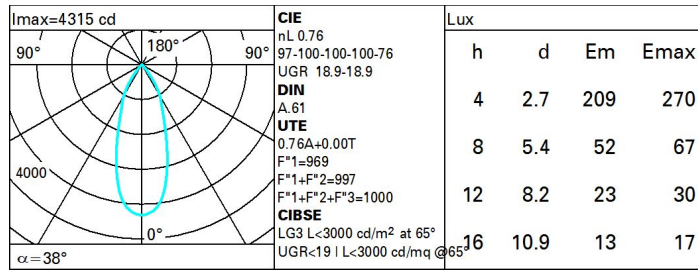

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	64	61	59	63	61	60	58	76
1.0	71	67	65	63	67	64	64	61	81
1.5	75	72	70	68	71	69	69	66	87
2.0	77	75	74	72	74	73	72	70	92
2.5	78	77	76	75	76	75	74	72	95
3.0	79	78	78	77	77	76	75	74	97
4.0	80	80	79	79	78	78	77	75	99
5.0	81	80	80	80	79	79	77	76	100

Curva limite di luminanza

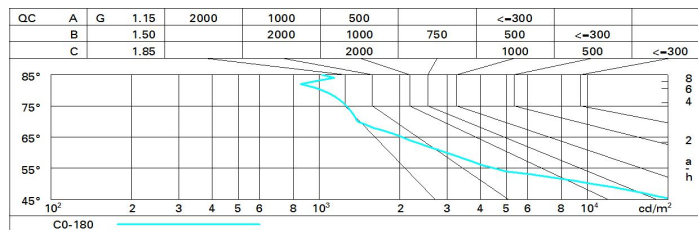


Diagramma UGR

Corrected UGR values (at 2990 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	19.5	20.2	19.8	20.4	20.6	19.5	20.2	19.8	20.4	20.6
	3H	19.4	19.9	19.7	20.2	20.5	19.4	19.9	19.7	20.2	20.5
	4H	19.3	19.8	19.6	20.1	20.4	19.3	19.8	19.6	20.1	20.4
	6H	19.2	19.7	19.6	20.0	20.4	19.2	19.7	19.6	20.0	20.4
	8H	19.2	19.7	19.5	20.0	20.3	19.2	19.7	19.5	20.0	20.3
	12H	19.1	19.6	19.5	19.9	20.3	19.1	19.6	19.5	19.9	20.3
4H	2H	19.3	19.8	19.6	20.1	20.4	19.3	19.8	19.6	20.1	20.4
	3H	19.1	19.6	19.5	19.9	20.3	19.1	19.6	19.5	19.9	20.3
	4H	19.1	19.5	19.5	19.8	20.2	19.1	19.5	19.5	19.8	20.2
	6H	19.0	19.3	19.4	19.7	20.1	19.0	19.3	19.4	19.7	20.1
	8H	18.9	19.3	19.4	19.7	20.1	18.9	19.3	19.4	19.7	20.1
	12H	18.9	19.2	19.3	19.6	20.1	18.9	19.2	19.3	19.6	20.1
8H	4H	18.9	19.3	19.4	19.7	20.1	18.9	19.3	19.4	19.7	20.1
	6H	18.8	19.1	19.3	19.6	20.0	18.8	19.1	19.3	19.6	20.0
	8H	18.8	19.0	19.3	19.5	20.0	18.8	19.0	19.3	19.5	20.0
	12H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
12H	4H	18.9	19.2	19.3	19.6	20.1	18.9	19.2	19.3	19.6	20.1
	6H	18.8	19.0	19.3	19.5	20.0	18.8	19.0	19.3	19.5	20.0
	8H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
Variations with the observer position at spacing:											
S =	1.0H	5.2 / -12.6					5.2 / -12.6				
	1.5H	8.0 / -14.5					8.0 / -14.5				
	2.0H	10.0 / -15.7					10.0 / -15.7				