



Last information update: April 2024

Product configuration: BV03

BV03: Spotlight with bracket - Warm White COB LED - Integrated dimm electronic control gear DALI - Flood optic

**Product code**

BV03: Spotlight with bracket - Warm White COB LED - Integrated dimm electronic control gear DALI - Flood optic

Technical description

Spotlight designed to use Warm White COB LED lamps and a 30° flood optic. Can be installed at ground level, on walls (using screw anchors) and on pole mounting systems. Consists of an optic assembly, component box, glass-holder frame and bracket. The optical assembly, component box, and glass-holder frame are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The 4 mm thick, tempered, sodium-calcium, closing glass is colourless, transparent and a seal is included. The 50/60 Shore A silicone seal is subjected to a post-curing treatment, in an oven, for 4 hours at 220 °C. The glass unit is fixed to the frame with silicone. The product comes complete with a warm white colour, monochrome COB LED circuit, an optic with a 99.93% super-pure aluminium OPTIBEAM reflector with a polished, anodized surface and built-in electronic ballast. Zinc-coated stainless steel ballast holding plate; simplified extraordinary maintenance thanks to quick-coupling connectors between the control gear and the LED and the control gear and the wiring terminal block. Painted aluminium alloy box and rear cover, complete with spacers and captive screws. The floodlight can be adjusted by $\pm 15^\circ$ in the vertical plane using a painted steel bracket, with a graduated scale showing 10° steps and mechanical stops to guarantee stable aiming of the beam of light. Horizontal aiming is performed using the holes and slots in the bracket. Access to the optical assembly is simpler thanks to a nickel-plated brass decompression valve which eliminates the product internal vacuum. Set up for pass-through wiring using a double M24x1.5 nickel-plated brass cable gland (suitable for cables with 7÷16mm diameter). All external screws used are made of A2 stainless steel and are of the captive type. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

Installation

The luminaire can be floor, ceiling or wall-mounted using the supporting bracket fixed with screw anchors (Fisher type or similar) for concrete, cement and solid brick or various other available accessories. It can also be installed on MultiWoody, Citywoody and FrameWoody square structure pole systems.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

7.6

Mounting

wall arm|pole arm|ground surface|wall surface|ground anchored|wall bracket|ceiling surface|u-bracket|pole-top

Wiring


Control gear complete with dimmable DALI electronic ballast (220÷240V ac 50/60Hz) and wiring terminal block.

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	6840	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
W system:	56.5	Lamp code:	LED
Im source:	8550	Number of lamps for optical assembly:	1
W source:	51	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	121.1	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallio temperatura ambiente:	from -30°C to 50°C.
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	80	Inrush current:	37 A / 233 µs
Beam angle [°]:	30°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 5 luminaires B16A: 8 luminaires C10A: 8 luminaires C16A: 13 luminaires
CRI (minimum):	80	Minimum dimming %:	10
Colour temperature [K]:	3000	Overvoltage protection:	8kV Common mode & 6kV Differential mode
MacAdam Step:	2	Control:	DALI-2
Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)		

Polar

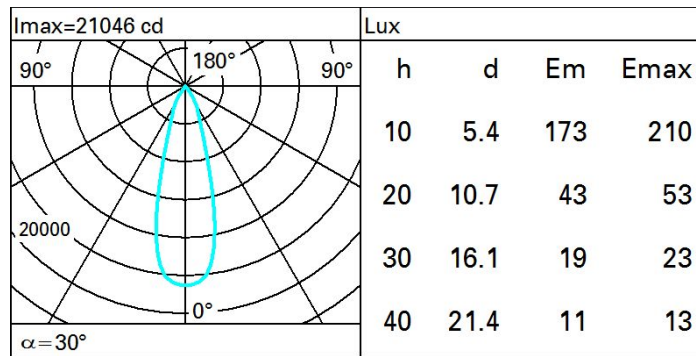

Isolux

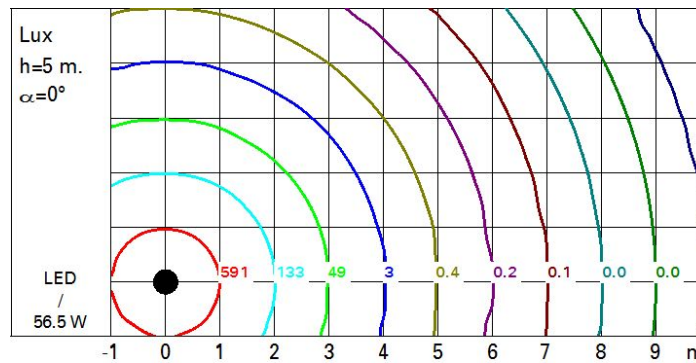

UGR diagram

Corrected UGR values (at 8550 lm bare lamp luminous flux)												
Reflect.:		viewed crosswise					viewed endwise					
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim												
x	y											
2H	2H	10.6	12.6	11.0	12.9	13.2	10.6	12.6	11.0	12.9	13.2	
	3H	10.5	12.0	10.8	12.3	12.7	10.5	12.0	10.8	12.3	12.7	
	4H	10.4	11.7	10.8	12.1	12.4	10.4	11.7	10.8	12.1	12.4	
	6H	10.3	11.5	10.7	11.8	12.2	10.3	11.5	10.7	11.8	12.2	
	8H	10.3	11.4	10.7	11.8	12.1	10.3	11.4	10.7	11.7	12.1	
	12H	10.2	11.3	10.6	11.7	12.1	10.2	11.3	10.6	11.7	12.1	
4H	2H	10.4	11.7	10.8	12.1	12.4	10.4	11.7	10.8	12.1	12.4	
	3H	10.2	11.3	10.6	11.7	12.1	10.2	11.3	10.6	11.7	12.1	
	4H	10.1	11.1	10.6	11.5	11.9	10.1	11.1	10.6	11.5	11.9	
	6H	9.8	11.3	10.3	11.8	12.2	9.8	11.3	10.3	11.8	12.2	
	8H	9.7	11.4	10.2	11.9	12.3	9.7	11.4	10.2	11.9	12.3	
	12H	9.6	11.4	10.1	11.9	12.4	9.6	11.4	10.1	11.9	12.4	
8H	4H	9.7	11.4	10.2	11.9	12.3	9.7	11.4	10.2	11.9	12.3	
	6H	9.5	11.3	10.0	11.7	12.3	9.5	11.3	10.0	11.7	12.3	
	8H	9.5	11.0	10.0	11.5	12.1	9.5	11.0	10.0	11.5	12.1	
	12H	9.6	10.7	10.2	11.2	11.7	9.6	10.7	10.2	11.2	11.7	
12H	4H	9.6	11.4	10.1	11.9	12.4	9.6	11.4	10.1	11.9	12.4	
	6H	9.5	11.0	10.0	11.5	12.1	9.5	11.0	10.0	11.5	12.1	
	8H	9.6	10.7	10.2	11.2	11.7	9.6	10.7	10.2	11.2	11.7	
Variations with the observer position at spacing:												
S =		1.0H	6.5 / -16.5				6.5 / -16.5					
		1.5H	9.3 / -17.9				9.3 / -17.9					
		2.0H	11.3 / -19.1				11.3 / -19.1					