

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: PI08

PI08: Frame adjustable 2 x 15-cell recessed luminaire - LED - Warm White - DALI dimmable power supply



Product code

PI08: Frame adjustable 2 x 15-cell recessed luminaire - LED - Warm White - DALI dimmable power supply

Technical description

Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The two linear elements with 15 lighting cells, in die-cast aluminium and independently adjustable, can be used to direct the emission with a tilting adjustability of +/- 20°. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and controlled glare emission. Supplied with DALI dimmable power supply connected to the luminaire.

Installation

recessed with mechanical blocking system for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal)

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

1.65

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

on power supply box: screw connections.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	4362	CRI (minimum):	90
W system:	48	Colour temperature [K]:	3000
lm source:	2660	MacAdam Step:	3
W source:	21	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	90.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	2
Beam angle [°]:	42°	Control:	DALI-2


Polar

<p>Imax=4232 cd 90° 180° 90° 4000 0° α = 42°</p>	CIE nL 0.82 100-100-100-100-82 UGR 14.8-14.8 DIN A.61 UTE 0.82A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<16 L<1500 cd/mq @65°				Lux			
	h	d	Em	Emax				
	2	1.5	849	1058				
	4	3.1	212	264				
	6	4.6	94	118				
	8	6.1	53	66				

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	65	70	67	67	64	78
1.0	77	74	71	70	73	71	70	68	83
1.5	81	78	76	75	78	76	75	73	89
2.0	84	82	80	79	81	79	78	76	93
2.5	85	84	83	82	83	82	81	78	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	81	99
5.0	88	87	87	87	86	85	84	82	100

Luminance curve limit

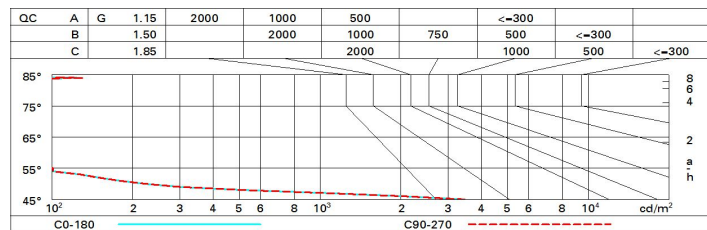

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.4	15.9	15.7	10.2	10.4	15.4	15.9	15.7	10.2	10.4
	3H	15.3	15.8	15.6	10.0	10.3	15.3	15.8	15.6	10.0	10.3
	4H	15.2	15.7	15.6	10.0	10.2	15.2	15.7	15.6	10.0	10.2
	6H	15.1	15.6	15.5	15.9	10.2	15.1	15.6	15.5	15.9	10.2
	8H	15.1	15.5	15.5	15.8	10.2	15.1	15.5	15.5	15.8	10.2
	12H	15.1	15.4	15.4	15.8	10.1	15.1	15.4	15.4	15.8	10.1
4H	2H	15.2	15.7	15.6	10.0	10.2	15.2	15.7	15.6	10.0	10.2
	3H	15.1	15.4	15.4	15.8	10.1	15.1	15.4	15.4	15.8	10.1
	4H	15.0	15.3	15.4	15.7	10.1	15.0	15.3	15.4	15.7	10.1
	6H	14.9	15.2	15.3	15.6	10.0	14.9	15.2	15.3	15.6	10.0
	8H	14.8	15.1	15.3	15.5	10.0	14.8	15.1	15.3	15.5	10.0
	12H	14.8	15.0	15.3	15.5	15.9	14.8	15.0	15.3	15.5	15.9
8H	4H	14.8	15.1	15.3	15.5	10.0	14.8	15.1	15.3	15.5	10.0
	6H	14.8	15.0	15.2	15.4	15.9	14.8	15.0	15.2	15.4	15.9
	8H	14.7	14.9	15.2	15.3	15.8	14.7	14.9	15.2	15.3	15.8
	12H	14.6	14.8	15.1	15.3	15.8	14.6	14.8	15.1	15.3	15.8
12H	4H	14.8	15.0	15.3	15.5	15.9	14.8	15.0	15.3	15.5	15.9
	6H	14.7	14.9	15.2	15.3	15.8	14.7	14.9	15.2	15.3	15.8
	8H	14.6	14.8	15.1	15.3	15.8	14.6	14.8	15.1	15.3	15.8
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -34.2					6.3 / -34.2				
	1.5H	9.1 / -35.8					9.1 / -35.8				
	2.0H	11.1 / -37.1					11.1 / -37.1				