


Last information update: April 2024

**Product configuration: N974+N982.01**

N974: Profile for a continuous line L 3594

N982.01: LED module - L 1196 - dark-light emission - warm white - integrated DALI dimmable control gear - 42W 5600lm - 3000K - White



**Product code**

N974: Profile for a continuous line L 3594 **Attention! Code no longer in production**

**Technical description**

Frame version extruded aluminium intermediate profile with contact frame for down emission; complete with superpure aluminium lamellar optic screen with an anodised mirror finish. Controlled luminance  $L \leq 1500 \text{ cd/mq}^2$  -  $\alpha > 65^\circ$ .

**Installation**

Recessed using the brackets on the profile; the mechanical systems for connecting the modules are included in the package.

**Colour**

White (01) | Aluminium (12)

**Mounting**

ceiling recessed

**Wiring**

Set up to house the LED modules required by the system.

**Notes**

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations



**Product code**

N982.01: LED module - L 1196 - dark-light emission - warm white - integrated DALI dimmable control gear - 42W 5600lm - 3000K - White **Attention! Code no longer in production**

**Technical description**

LED module set up for housing in iN60 Dark Light down emission system initial or intermediate profiles. Extruded aluminium heat sink linear element. Combined with the lamellar optic screen housed in the system profiles, the luminaire generates an emission with controlled luminance  $L \leq 1500 \text{ cd/m}^2$  -  $\alpha > 65^\circ$ , for use in environments with video monitors in compliance with EN 12464-1. Supplied with integrated dimmable DALI control gear. Warm white LED.

**Installation**

Module insertion on profiles with a mechanical easy-push system (steel snap-on spring).

**Colour**

White (01)

**Weight (Kg)**

1.47

**Wiring**

Quick coupling input/output terminal block connection to simplify connections between the luminaires. LED module complete with integrated DALI control gear.

Complies with EN60598-1 and pertinent regulations




IP20



**Technical data**

lm system:	11253	CRI:	80
W system:	147.9	Colour temperature [K]:	3000
lm source:	16800	MacAdam Step:	3
W source:	126	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	76.1	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	67	Number of optical assemblies:	1


# Polar

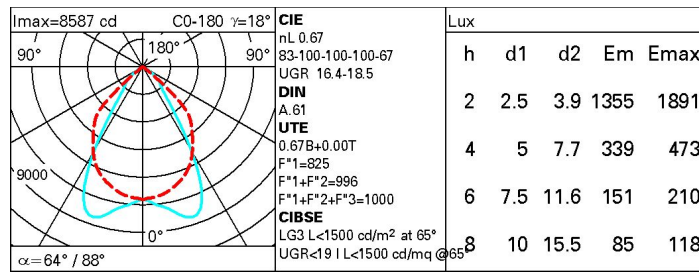

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	55	51	47	45	50	47	47	44	65
1.0	59	55	52	50	54	51	51	48	72
1.5	63	60	58	56	60	58	57	54	81
2.0	66	64	62	61	63	61	61	58	87
2.5	68	66	65	63	65	64	63	61	90
3.0	69	67	66	65	66	65	64	62	93
4.0	70	69	68	67	67	67	66	64	95
5.0	70	69	69	68	68	67	66	64	96

# Luminance curve limit

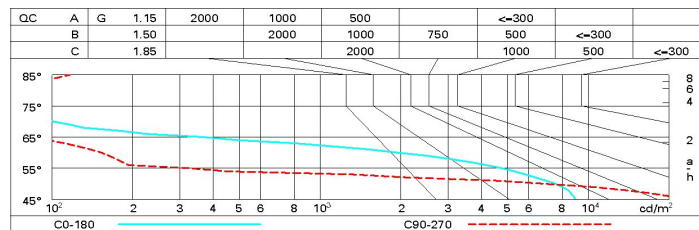

# UGR diagram

Corrected UGR values (at 16800 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	16.9	17.6	17.2	17.9	18.1	19.0	19.7	19.3	20.0	20.2
	3H	16.8	17.4	17.1	17.7	18.0	18.9	19.5	19.3	19.8	20.1
	4H	16.7	17.3	17.1	17.6	17.9	18.9	19.4	19.2	19.7	20.0
	6H	16.7	17.2	17.0	17.5	17.8	18.8	19.3	19.1	19.6	19.9
	8H	16.6	17.1	17.0	17.4	17.8	18.7	19.2	19.1	19.6	19.9
	12H	16.6	17.1	17.0	17.4	17.8	18.7	19.2	19.1	19.5	19.9
4H	2H	16.8	17.3	17.1	17.6	17.9	18.8	19.4	19.2	19.7	20.0
	3H	16.6	17.1	17.0	17.4	17.8	18.7	19.2	19.1	19.5	19.9
	4H	16.5	16.9	16.9	17.3	17.7	18.6	19.0	19.0	19.4	19.8
	6H	16.4	16.8	16.9	17.2	17.6	18.5	18.9	19.0	19.3	19.7
	8H	16.4	16.7	16.8	17.1	17.6	18.5	18.8	18.9	19.2	19.7
	12H	16.3	16.6	16.8	17.1	17.5	18.4	18.7	18.9	19.2	19.6
8H	4H	16.4	16.7	16.8	17.1	17.6	18.5	18.8	18.9	19.2	19.7
	6H	16.3	16.6	16.8	17.0	17.5	18.4	18.7	18.9	19.1	19.6
	8H	16.2	16.5	16.7	16.9	17.4	18.3	18.6	18.8	19.0	19.5
	12H	16.2	16.4	16.7	16.9	17.4	18.3	18.5	18.8	19.0	19.5
12H	4H	16.3	16.6	16.8	17.1	17.5	18.4	18.7	18.9	19.2	19.6
	6H	16.2	16.5	16.7	16.9	17.4	18.3	18.6	18.8	19.0	19.5
	8H	16.2	16.4	16.7	16.9	17.4	18.3	18.5	18.8	19.0	19.5
Variations with the observer position at spacing:											
S =		1.0H	2.7 / -3.8					2.7 / -22.3			
		1.5H	3.5 / -12.3					4.7 / -20.5			
		2.0H	5.4 / -22.4					6.6 / -27.1			