



Design iGuzzini /
Arup

Produktkonfiguration: Q328
Q328: Rechteckiger Strahler mit kleinem Korpus - Medium



Isolux

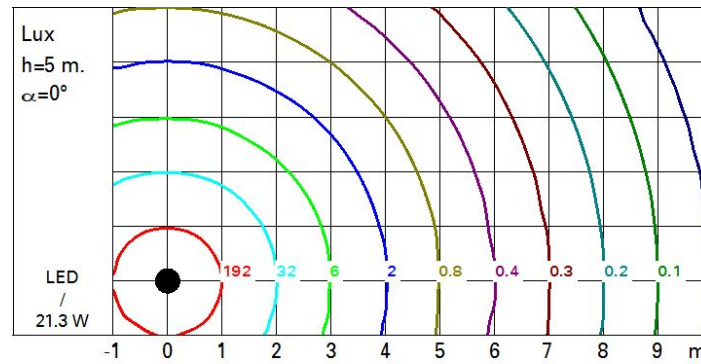

UGR-Diagramm

Corrected UGR values (at 2450 lm bare lamp luminous flux)												
Riflect.:												
cei/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim		viewed					viewed					
x	y	crosswise					endwise					
2H	2H	11.7	13.7	12.1	14.0	14.3	11.7	13.7	12.1	14.0	14.3	
	3H	12.4	14.0	12.8	14.3	14.6	11.9	13.5	12.3	13.8	14.1	
	4H	12.7	14.0	13.1	14.3	14.7	12.0	13.3	12.4	13.6	14.0	
	6H	12.9	13.9	13.3	14.3	14.6	12.0	13.1	12.4	13.4	13.8	
	8H	12.9	13.9	13.3	14.3	14.6	12.0	13.0	12.4	13.4	13.7	
	12H	12.9	13.9	13.3	14.3	14.6	12.0	13.0	12.4	13.3	13.7	
4H	2H	12.0	13.3	12.4	13.6	14.0	12.7	14.0	13.1	14.3	14.7	
	3H	13.0	13.9	13.4	14.3	14.7	13.1	14.1	13.5	14.5	14.9	
	4H	13.3	14.2	13.7	14.6	15.0	13.3	14.2	13.7	14.6	15.0	
	6H	13.3	14.8	13.7	15.3	15.7	13.1	14.7	13.6	15.1	15.6	
	8H	13.2	15.0	13.7	15.5	15.9	13.0	14.8	13.5	15.3	15.8	
	12H	13.1	15.0	13.6	15.5	16.0	12.9	14.8	13.5	15.3	15.8	
8H	4H	13.0	14.8	13.5	15.3	15.8	13.2	15.0	13.7	15.5	15.9	
	6H	13.3	15.0	13.8	15.5	16.0	13.3	15.0	13.8	15.5	16.1	
	8H	13.4	14.9	13.9	15.4	16.0	13.4	14.9	13.9	15.4	16.0	
	12H	13.6	14.6	14.1	15.1	15.7	13.6	14.6	14.1	15.1	15.7	
12H	4H	12.9	14.8	13.5	15.3	15.8	13.1	15.0	13.6	15.5	16.0	
	6H	13.3	14.8	13.8	15.3	15.9	13.4	14.9	13.9	15.4	15.9	
	8H	13.6	14.6	14.1	15.1	15.7	13.6	14.6	14.1	15.1	15.7	
Variations with the observer position at spacing:												
S =		1.0H	1.1 / -0.7				1.1 / -0.7					
		1.5H	2.4 / -1.2				2.4 / -1.2					
		2.0H	3.7 / -1.6				3.7 / -1.6					