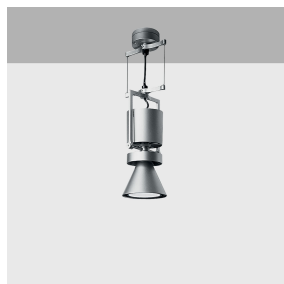


Last information update: May 2024

**Product configuration: MP71+J005**

MP71: Medium body spotlight - Neutral white - electronic ballast and dimmer - flood optic

J005: Suspension L = 500 mm

**Product code**MP71: Medium body spotlight - Neutral white - electronic ballast and dimmer - flood optic **Attention! Code no longer in production****Technical description**

Pendant luminaire equipped with a ballast unit made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (even during maintenance operations). Luminaire for high output LED lamp with monochrome emission in a neutral white colour tone (4000K). Dimmable electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

Ceiling-mounted using the ballast unit included.

**Colour**

Grey (15)

**Weight (Kg)**

1.45

**Mounting**

ceiling pendant

**Wiring**

The dimmable electronic components are housed in the luminaire.

Complies with EN60598-1 and pertinent regulations




850°C

IP20

IP40

for optical assembly

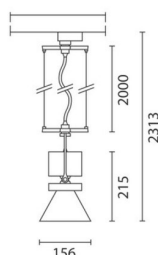
**Technical data**

Im system:	2514	CRI:	80
W system:	23.9	Colour temperature [K]:	4000
Im source:	3400	MacAdam Step:	2
W source:	20	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	105.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	1
Beam angle [°]:	36°	Control:	Completo di dimmer

**Polar**

Imax=5626 cd		Lux			
90°	180°	90°	h	d	Em Emax
			2	1.3	1119 1406
			4	2.6	280 352
			6	3.9	124 156
			8	5.2	70 88
$\alpha = 36^\circ$					

### Isolux

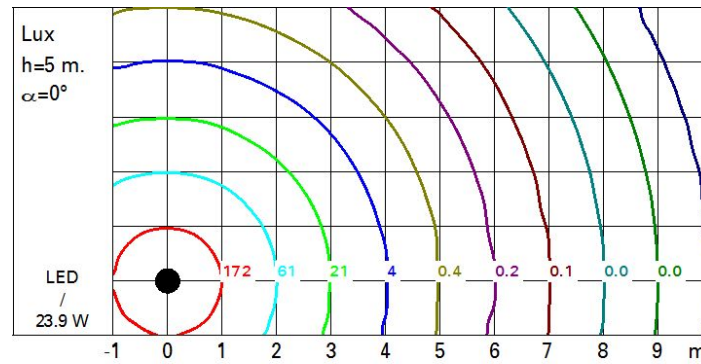

### UGR diagram

Corrected UGR values (at 3400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	15.4	16.0	15.6	16.2	16.4	15.4	16.0	15.6	16.2	16.4
	3H	15.2	15.8	15.5	16.1	16.3	15.2	15.8	15.5	16.0	16.3
	4H	15.2	15.7	15.5	16.0	16.3	15.2	15.7	15.5	16.0	16.3
	6H	15.1	15.6	15.4	15.9	16.2	15.1	15.6	15.4	15.9	16.2
	8H	15.1	15.5	15.4	15.8	16.2	15.0	15.5	15.4	15.8	16.2
	12H	15.0	15.4	15.4	15.8	16.1	15.0	15.4	15.4	15.8	16.1
4H	2H	15.2	15.7	15.5	16.0	16.3	15.2	15.7	15.5	16.0	16.3
	3H	15.0	15.5	15.4	15.8	16.1	15.0	15.5	15.4	15.8	16.1
	4H	14.9	15.3	15.3	15.7	16.1	14.9	15.3	15.3	15.7	16.1
	6H	14.8	15.2	15.3	15.6	16.0	14.8	15.2	15.3	15.6	16.0
	8H	14.8	15.1	15.2	15.5	16.0	14.8	15.1	15.2	15.5	16.0
	12H	14.8	15.0	15.2	15.5	15.9	14.8	15.0	15.2	15.5	15.9
8H	4H	14.8	15.1	15.2	15.5	16.0	14.8	15.1	15.2	15.5	16.0
	6H	14.7	15.0	15.2	15.4	15.9	14.7	15.0	15.2	15.4	15.9
	8H	14.7	14.9	15.1	15.3	15.8	14.7	14.9	15.1	15.3	15.8
	12H	14.6	14.8	15.1	15.3	15.8	14.6	14.8	15.1	15.3	15.8
12H	4H	14.8	15.0	15.2	15.5	15.9	14.8	15.0	15.2	15.5	15.9
	6H	14.7	14.9	15.1	15.3	15.8	14.7	14.9	15.1	15.3	15.8
	8H	14.6	14.8	15.1	15.3	15.8	14.6	14.8	15.1	15.3	15.8
Variations with the observer position at spacing:											
S =		1.0H	5.8 / -12.8				5.8 / -12.8				
		1.5H	8.6 / -14.2				8.6 / -14.2				
		2.0H	10.6 / -15.7				10.6 / -15.7				