

# Y Light

design Studio & Partners



## Features




- Pendant and wall-mounted installation and floor lamp version.
- Optical assembly with extruded aluminium lateral profiles.
- Injection moulded polycarbonate end caps, painted sheet steel internal structure.
- Floor lamp version: extruded aluminium shaft with quick-coupling connectors for assembly to the 8 mm thick steel base.
- Luminaires with controlled luminance, suitable for use in environments with video terminals.
- Available electronic and DALI control gear and emergency with inverter.
- Dimmable DALI versions with Switch Dim: can be switched on and off via a regular electric button.
- Pendant version with cables equipped with millimetric regulation system.



## Light distribution

### Polycarbonate screens

Another version has a micro-prismatic polycarbonate diffuser and polycarbonate transfective film. Light flow emission is: 65% up light, 35% down light.



Up/down light

## Y Light

### Versions

---

Y Light pendant, wall-mounted and floor lamp, is a system of luminaires for working areas and those where video terminals are used, for showrooms and meeting rooms.

Wall-mounted TC-L




Floor lamp

Versions with day-light sensor and presence detector are available



## Pendant

## accessories




light source	W	length	code	colour
<b>Up/down light</b>				
Dual-start electronic				
TC-L (2G11)	4x55 W	620	3040	15
	4x80 W	620	3041	15
DALI				
	4x55 W	620	3042	15
DALI versions occupy 2 addresses Complete with covering base, power-supply cable and steel suspension cables L=1500				

	code	colour
Upper safety screen	9142	24
	for 3040-3042	

## Wall-mounted

## accessories




light source	W	length	code	colour
<b>Up/down light</b>				
Electronic				
TC-L (2G11)	2x55 W	620	5152	15
	2x80 W	620	5155	15
DALI				
	2x55 W	620	5153	15
Electronic and permanent emergency light				
	2x55 W	620	5154	15
DALI versions occupy 1 address				

	code	colour
Upper safety screen	9171	24
	for 5152-5153	

## Floor lamp

## accessories

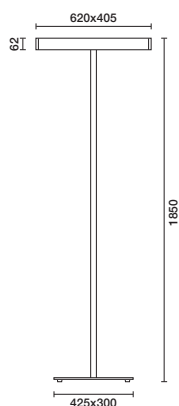

light source	W	code	colour
<b>Up/down light</b>			
Dual-start electronic			
TC-L (2G11)	4x55 W	4577	15
DALI and manual light adjustment			
	4x55 W	4578	15
DALI with motion and lux sensors			
	4x55 W	4579	15
Supplied with cable L=2000 with plug			

	code	colour
Upper safety screen	9142	24
	for 4577-4578	