



Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	58	53	48	57	52	51	46	52
1.0	72	65	59	55	63	59	58	53	59
1.5	80	74	70	66	73	69	68	64	71
2.0	85	80	77	74	79	76	75	70	78
2.5	87	84	81	78	82	80	79	75	83
3.0	89	86	84	82	85	82	81	77	86
4.0	91	89	87	85	87	85	84	81	90
5.0	92	91	89	87	89	87	86	82	92

Courbe limite de luminance

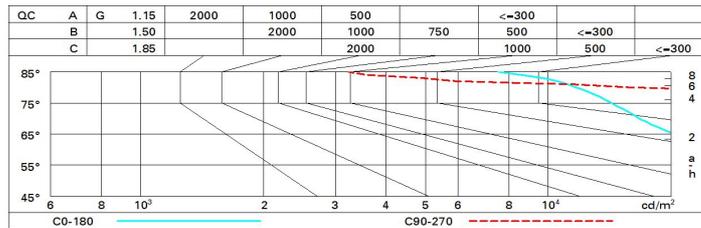


Diagramme UGR

Corrected UGR values (at 4400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	20.8	27.7	27.1	28.0	28.2	32.2	33.1	32.5	33.3	33.0
	3H	20.8	27.6	27.1	27.8	28.1	32.2	33.0	32.5	33.3	33.0
	4H	20.7	27.5	27.1	27.8	28.1	32.1	32.9	32.5	33.2	33.5
	6H	20.7	27.3	27.0	27.7	28.0	32.1	32.7	32.4	33.1	33.4
	8H	20.6	27.3	27.0	27.6	28.0	32.0	32.7	32.4	33.0	33.4
	12H	20.6	27.2	27.0	27.6	27.9	32.0	32.6	32.4	33.0	33.3
4H	2H	27.5	28.3	27.9	28.6	28.9	33.4	34.1	33.7	34.4	34.7
	3H	27.5	28.1	27.9	28.5	28.8	33.6	34.2	34.0	34.6	34.9
	4H	27.5	28.0	27.9	28.4	28.8	33.6	34.1	34.0	34.5	34.9
	6H	27.4	27.9	27.8	28.3	28.7	33.5	34.0	34.0	34.4	34.8
	8H	27.4	27.8	27.8	28.2	28.7	33.5	33.9	33.9	34.4	34.8
	12H	27.3	27.7	27.8	28.2	28.6	33.5	33.9	33.9	34.3	34.7
8H	4H	27.7	28.1	28.1	28.5	29.0	33.7	34.1	34.1	34.6	35.0
	6H	27.6	28.0	28.1	28.4	28.9	33.7	34.1	34.2	34.5	35.0
	8H	27.6	27.9	28.1	28.4	28.9	33.7	34.0	34.2	34.4	34.9
	12H	27.6	27.8	28.1	28.3	28.8	33.6	33.9	34.1	34.4	34.9
12H	4H	27.7	28.1	28.1	28.5	29.0	33.7	34.1	34.1	34.5	34.9
	6H	27.6	28.0	28.1	28.4	28.9	33.7	34.0	34.1	34.4	34.9
	8H	27.6	27.9	28.1	28.4	28.9	33.6	33.9	34.1	34.4	34.9
Variations with the observer position at spacing:											
S =	1.0H	1.6 / -3.0					0.4 / -0.4				
	1.5H	2.6 / -5.2					0.6 / -1.2				
	2.0H	3.8 / -6.5					1.5 / -1.6				