


Project name: _____

Type: _____



Surface mounted luminaire with 360° radial optic that emphasizes spaces with highly concentrated lines of light. Design by Dean Skira

Luminaire characteristics:

Input load: 13.6W

Lumens: 448lm

Luminaire efficacy: 32lm/W

Source: LED module, (LM-80 tested)

3000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours (L80),(LM-79 tested)

Optics: 360° radial effect

Mounting: Wall or ceiling mounted on standard 4" J box.
Floor mounting in dry location only (interior)

Material:

Body: Die-cast aluminum

Diffuser: PMMA lens

Hardware: Stainless steel screws

Electrical: Integral high efficiency electronic power supply, rated at 50000 hours, 120-277V.

Finish: White RAL9016 or White/Gray painted finish with a high level of weather and UV resistance. The semi-gloss finish coating is electrostatically applied, durable acrylic enamel baked at high temperatures for superior color retentive finish. White/Chrome finish available for indoor use only.


Weight: 2.55lb (1.15kg)

Contact temperature: Less than 50°C (122°F)


Warranty: 5 year limited warranty

Certification: cULus listed for wet location

Ratings: IP66, IK07

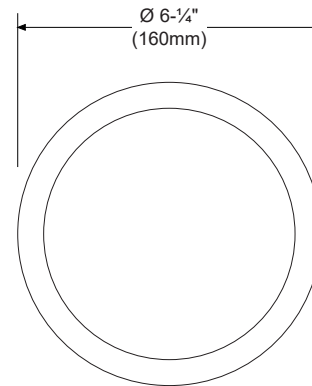

FRONT VIEW

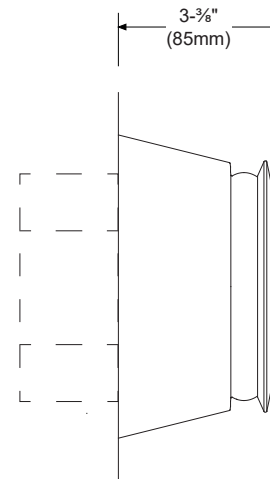

SIDE VIEW

Project name: _____

Type: _____

ORDERING INFO

MODEL	VOLTAGE	FINISH
<input type="radio"/> IBU23	<input type="radio"/> UNV - 120-277V	<input type="radio"/> 01 - White
		<input type="radio"/> E4 - White/Chrome*
		<input type="radio"/> E5 - White/Gray

* Available only for indoor use

ACCESSORIES (TO BE ORDERED SEPARATELY)

- IX021** - 3 Trick bits Ø 3/8" (9mm)
H: 1" (25mm)





- IX022** - 3 Trick bits Ø 1/2" (13mm)
H: 1" (25mm)



TECHNICAL DATA

LOAD (W)	CCT (K)	CRI	OPTIC	DELIVERED LUMENS (lm)	LUMINAIRE EFFICACY (lm / w)	CENTER BEAM CANDLE POWER (cd)	MODEL
13.6W	3000K	80	360° radial effect	448	32	241	IBU23



Distance (h)	Illuminance	Cornice(c)
3.3'	23.22 fc	4"
6.5'	5.29 fc	6"
9.8'	3.72 fc	7.8"

