


Last information update: April 2024

Product configuration: Q388+INCA
Q388: Frame Angular Module - General Down Light - Neutral LED
INCA: Recessed



Product code
Q388: Frame Angular Module - General Down Light - Neutral LED **Attention! Code no longer in production**

Technical description
Angular element for Frame version profiles with contact frame; including a Neutral LED module. Methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping. Integrated control gear. Pass-through wiring for continuous lines:

Installation
Recessed using the brackets on the profile.

Colour	Weight (Kg)
White (01) Aluminium (12)	5.1

Mounting
ceiling recessed


Wiring
The angular profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks to simplify connections between the luminaires. LED module complete with integrated electronic control gear.

Notes
Take care when configuring the system; to complete a continuous line with an angular profile correctly, two initial modules are required, one for each side of the corner.

Complies with EN60598-1 and pertinent regulations



Technical data			
Im system:	3996	Colour temperature [K]:	4000
W system:	34.5	MacAdam Step:	3
Im source:	2700	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	15	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	115.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	74	Number of optical assemblies:	2
CRI (minimum):	80		

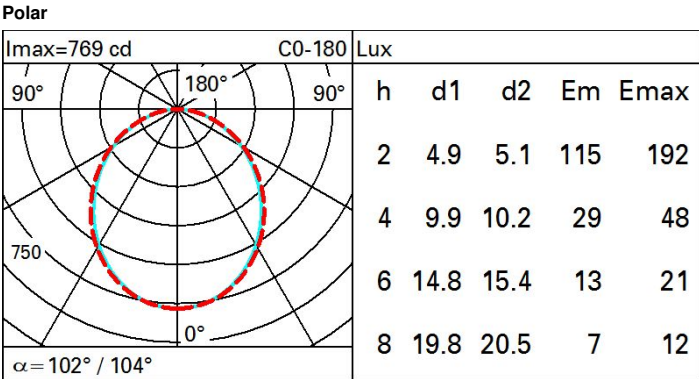

Isolux

