


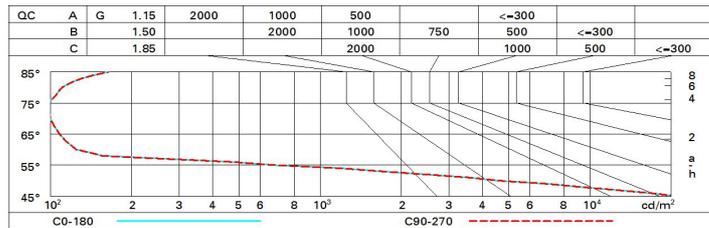

**Coefficienti di utilizzazione**

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	65	63	67	64	64	61	76
1.0	75	72	69	67	71	68	68	65	81
1.5	79	77	74	73	76	74	73	70	87
2.0	82	80	78	77	79	77	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	81	80	78	97
4.0	86	85	84	84	83	83	82	80	98
5.0	86	86	85	85	84	84	82	80	99

**Curva limite di luminanza**



**Diagramma UGR**

Corrected UGR values (at 3200 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	20.2	20.8	20.5	21.1	21.3	20.2	20.8	20.5	21.1	21.3
	3H	20.1	20.6	20.4	20.9	21.2	20.1	20.6	20.4	20.9	21.2
	4H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	6H	19.9	20.4	20.3	20.7	21.0	19.9	20.4	20.3	20.7	21.0
	8H	19.9	20.3	20.3	20.7	21.0	19.9	20.3	20.3	20.7	21.0
12H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0	
4H	2H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
	3H	19.9	20.3	20.2	20.6	21.0	19.9	20.3	20.2	20.6	21.0
	4H	19.8	20.1	20.2	20.5	20.9	19.8	20.1	20.2	20.5	20.9
	6H	19.7	20.0	20.1	20.4	20.8	19.7	20.0	20.1	20.4	20.8
	8H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
12H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7	
8H	4H	19.6	19.9	20.1	20.4	20.8	19.6	19.9	20.1	20.4	20.8
	6H	19.5	19.8	20.0	20.2	20.7	19.5	19.8	20.0	20.2	20.7
	8H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	12H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
12H	4H	19.6	19.9	20.0	20.3	20.7	19.6	19.9	20.0	20.3	20.7
	6H	19.5	19.7	20.0	20.2	20.7	19.5	19.7	20.0	20.2	20.7
	8H	19.4	19.6	19.9	20.1	20.6	19.4	19.6	19.9	20.1	20.6
Variations with the observer position at spacing:											
S =	1.0H	4.7 / -26.2				4.7 / -26.2					
	1.5H	7.5 / -31.2				7.5 / -31.2					
	2.0H	9.5 / -31.4				9.5 / -31.4					