

Front Light

Design iGuzzini


iGuzzini

Last information update: May 2024

Product configuration: P095+J005

P095: pendant - Neutral White - Flood Optic

J005: Suspension L = 500 mm



Product code

P095: pendant - Neutral White - Flood Optic **Attention! Code no longer in production**

Technical description

Pendant luminaire equipped with a three-phase adapter for electrified tracks, made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (during maintenance operations too). Luminaire for high yield C.O.B. technology LED lamp with monochrome emission in a neutral white colour tone (4000K). Flood optic. Equipped with electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. An external component may also be applied, such as directional flaps with 360° rotation.

Installation

On an electrified track

Colour

White (01) | Black (04) | Grey / Black (74)

Weight (Kg)

2.4

Mounting

three circuit track pendant|ceiling surface

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	5445	CRI:	80
W system:	50.3	Colour temperature [K]:	4000
Im source:	6900	MacAdam Step:	2
W source:	46	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	108.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	48°		


Polar

	CIE nL 0.79 99-100-100-100-79 UGR 11.0-10.9				Lux			
	DIN A.61				h	d	Em	E _{max}
	UTE 0.79A+0.00T F*1=986 F*1+F*2=997 F*1+F*2+F*3=1000				2	1.8	1975	2533
	CIBSE LG3 L<3000 cd/m² at 65° UGR<16 L<3000 cd/mq @65°				4	3.6	494	633
					6	5.3	219	281
					8	7.1	123	158

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	64	62	66	64	64	61	77
1.0	74	71	68	66	70	68	67	65	82
1.5	78	75	73	72	74	73	72	69	88
2.0	80	78	77	76	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	81	80	79	77	97
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

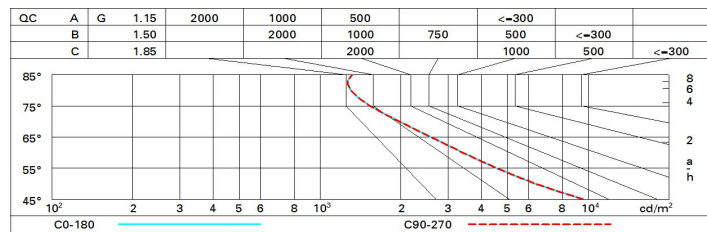

UGR diagram

Corrected UGR values (at 6900 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	11.2	11.8	11.5	12.0	12.3	11.2	11.8	11.5	12.0	12.3
	3H	11.2	11.7	11.5	12.0	12.3	11.1	11.7	11.4	11.9	12.2
	4H	11.1	11.6	11.5	11.9	12.2	11.1	11.6	11.4	11.9	12.2
	6H	11.1	11.5	11.4	11.9	12.2	11.0	11.5	11.4	11.8	12.1
	8H	11.1	11.5	11.4	11.8	12.2	11.0	11.4	11.3	11.7	12.1
	12H	11.0	11.5	11.4	11.8	12.1	10.9	11.4	11.3	11.7	12.1
4H	2H	11.1	11.6	11.4	11.9	12.2	11.1	11.6	11.5	11.9	12.2
	3H	11.1	11.5	11.4	11.8	12.2	11.1	11.5	11.5	11.8	12.2
	4H	11.0	11.4	11.4	11.8	12.2	11.0	11.4	11.4	11.8	12.2
	6H	11.0	11.3	11.4	11.7	12.1	11.0	11.3	11.4	11.7	12.1
	8H	11.0	11.3	11.4	11.7	12.1	10.9	11.2	11.4	11.6	12.1
	12H	10.9	11.2	11.4	11.6	12.1	10.9	11.2	11.3	11.6	12.0
8H	4H	10.9	11.2	11.4	11.6	12.1	11.0	11.3	11.4	11.7	12.1
	6H	10.9	11.1	11.4	11.6	12.1	10.9	11.2	11.4	11.6	12.1
	8H	10.9	11.1	11.4	11.6	12.1	10.9	11.1	11.4	11.6	12.1
	12H	10.9	11.0	11.4	11.5	12.0	10.8	11.0	11.3	11.5	12.0
12H	4H	10.9	11.2	11.3	11.6	12.0	10.9	11.2	11.4	11.6	12.1
	6H	10.8	11.1	11.3	11.5	12.0	10.9	11.1	11.4	11.6	12.1
	8H	10.8	11.0	11.3	11.5	12.0	10.9	11.0	11.4	11.5	12.0
Variations with the observer position at spacing:											
S =		1.0H					5.2 / -5.0				
		1.5H					7.9 / -6.2				
		2.0H					9.8 / -7.0				