


Design iGuzzini iGuzzini



RC99.01: 621X621 - Sound-absorbent - neutral white - MPO screen UGR<19 - DALI - 29.2W 3274.5lm - 4000K - White

RC99.01: 621X621 - Sound-absorbent - neutral white - MPO screen UGR $\leq$ 19 - DALI - 29.2W 3274.5lm - 4000K - White

621x621 mm luminaire for pendant installation or surface-mounted on a modular grille - LED lamp with high colour rendering index; 4000K neutral white colour tone emission. Body made of thermal insulating, sound-absorbent, 85% recycled polyester fibre material. OEKO-TEX certified, standard 100, class I, hypoallergenic, skin contact safe product. Waterproof, breathable, non putrescible panel. Product with high efficiency LED complete with MPO screen for UGR<19 L<3000 cd/mq $\alpha > 65^\circ$ emission, for use in environments with video monitors in compliance with EN 12464-1. The DALI driver is free to be placed inside the the installation compartment as shown on the instruction sheet. Option of recessed installation in plasterboard ceilings using a frame to be ordered as an accessory. The product can be pendant-mounted using accessories to be ordered separately.

Surface-mounted on 625x625 mm modular panels. Recessed in plasterboard false ceilings using a frame accessory to be ordered separately. Pendant-mounted using accessories to be ordered separately.

White (01)

1.9

Product complete with DALI components. The electrical cables used are made of a "halogen free" material. (This means that the cables do not contain any halogen materials that in the event of a fire do not emit toxic or corrosive gases and only a small quantity of opaque fumes).

See graph for acoustic calculation in Documentation Other colours and customised features are available on request.

Complies with EN60598-1 and pertinent regulations




Im system:	3275	Colour temperature [K]:	4000
W system:	29.2	MacAdam Step:	3
Im source:	5550	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
W source:	26	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	112.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	59	Number of optical assemblies:	1
CRI (minimum):	80	Control:	DALI-2

I_{max}=1897 cd	CIE nL 0.59 64-90-99-100-59 UGR 16.4-16.4
	DIN A.51
	UTE 0.59C+0.00T F"1=640 F"1+F"2=904 F"1+F"2+F"3=990
	CIBSE LG3 L<3000 cd/m² at 65° UGR<19 L<3000 cd/mq @

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	43	38	35	32	37	34	34	30	52
1.0	47	42	39	36	42	38	38	35	59
1.5	52	49	46	43	48	45	45	42	70
2.0	55	53	50	48	52	49	49	46	78
2.5	57	55	53	51	54	52	51	49	83
3.0	58	57	55	53	55	54	53	51	86
4.0	60	58	57	56	57	56	55	53	90
5.0	61	59	58	57	58	57	56	54	92

Luminance curve limit

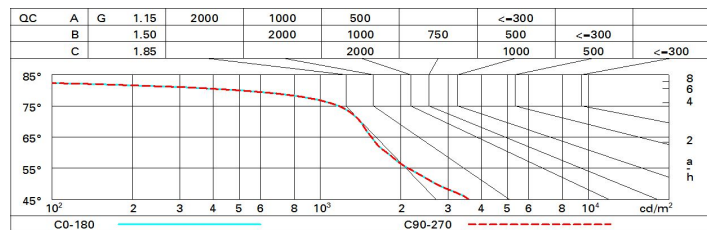

UGR diagram

Corrected UGR values (at 5550 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	14.7	15.7	15.0	15.9	16.2	14.7	15.7	15.0	15.9	16.2
	3H	15.4	16.3	15.8	16.6	16.9	14.9	15.8	15.2	16.1	16.4
	4H	15.7	16.5	16.0	16.8	17.2	15.0	15.8	15.3	16.1	16.4
	6H	15.8	16.5	16.1	16.9	17.2	15.0	15.7	15.3	16.1	16.4
	8H	15.7	16.5	16.1	16.8	17.2	15.0	15.7	15.3	16.0	16.4
	12H	15.7	16.4	16.1	16.8	17.1	14.9	15.6	15.3	16.0	16.3
4H	2H	15.0	15.8	15.3	16.1	16.4	15.7	16.5	16.0	16.8	17.2
	3H	15.9	16.6	16.3	17.0	17.3	16.1	16.8	16.5	17.2	17.5
	4H	16.3	16.9	16.7	17.3	17.7	16.3	16.9	16.7	17.3	17.7
	6H	16.4	16.9	16.8	17.4	17.8	16.4	16.9	16.8	17.3	17.8
	8H	16.4	16.9	16.8	17.3	17.7	16.4	16.9	16.8	17.3	17.7
	12H	16.3	16.8	16.8	17.2	17.7	16.3	16.8	16.8	17.2	17.7
8H	4H	16.4	16.9	16.8	17.3	17.7	16.4	16.9	16.8	17.3	17.7
	6H	16.5	16.9	17.0	17.4	17.9	16.5	16.9	17.0	17.3	17.8
	8H	16.5	16.8	17.0	17.3	17.8	16.5	16.8	17.0	17.3	17.8
	12H	16.4	16.7	16.9	17.2	17.7	16.4	16.8	17.0	17.2	17.8
12H	4H	16.3	16.8	16.8	17.2	17.7	16.3	16.8	16.8	17.2	17.7
	6H	16.5	16.8	17.0	17.3	17.8	16.4	16.8	16.9	17.3	17.8
	8H	16.4	16.8	17.0	17.2	17.8	16.4	16.7	16.9	17.2	17.7
Variations with the observer position at spacing:											
S =		0.5 / -0.6					0.5 / -0.6				
		1.0 / -1.4					1.0 / -1.4				
		2.0 / -1.8					2.0 / -1.8				