


Last information update: May 2024

Product configuration: MB70

MB70: Round recessed luminaire - D=226 mm H=103 mm - neutral white - DALI ballast - optic with asymmetrical double emission

**Product code**

MB70: Round recessed luminaire - D=226 mm H=103 mm - neutral white - DALI ballast - optic with asymmetrical double emission

Attention! Code no longer in production**Technical description**

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 2000 lm DALI LED unit in a neutral white tone 4000K and driver separate from the luminaire. Double asymmetrical light distribution.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.72


Mounting

ceiling recessed

Wiring


Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations


**Technical data**

lm system:	1879	Colour temperature [K]:	4000
W system:	18.6	MacAdam Step:	3
lm source:	2000	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	16	Lamp code:	LED
Luminous efficiency (lm/W, real value):	101	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	94	Control:	DALI
CRI:	80		

Polar

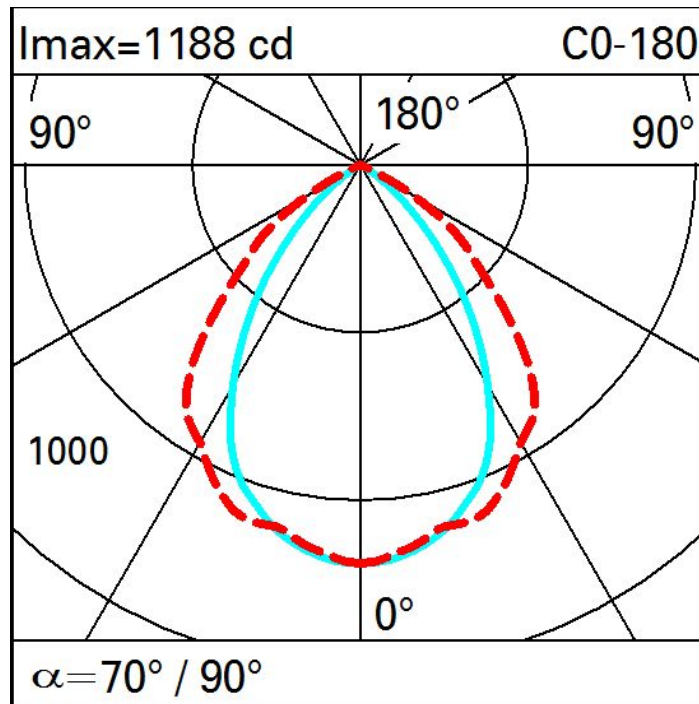

Isolux

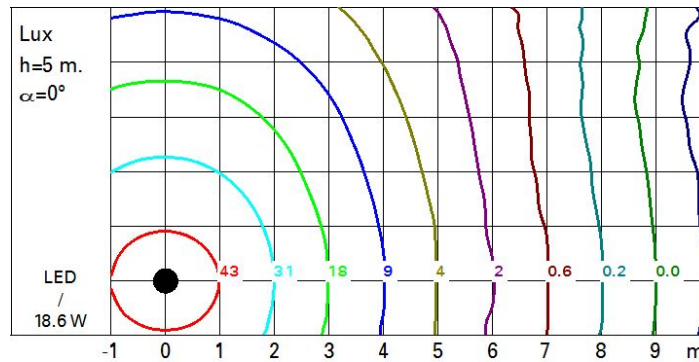

Illuminances

