

## Deep Frame



Design iGuzzini

iGuzzini

Last information update: August 2023

### Product configuration: P905

P905: Deep Frame - 3 elements - CoB warm LED- flood beam



### Product code

P905: Deep Frame - 3 elements - CoB warm LED- flood beam **Attention! Code no longer in production**

### Technical description

Three element recessed luminaire for LED lamps. Version with a perimeter frame. Shaped sheet steel structural frame. Die-cast aluminium, twin swivel universal joints located in a position set back from the installation surface to guarantee a high level of visual comfort. Tilts  $\pm 30^\circ$  around both the horizontal and vertical axes. Die-cast aluminium lighting bodies designed to optimise heat dispersal. High efficiency aluminium reflectors - flood angle. High color rendering index, warm white LED lamps. Each lamp unit has its own glass cover. The installation system is toolfree. Control gear unit included.

### Installation

Recessed in 1 to 30 mm thick false ceilings. Steel wire fixing springs. Preparation hole 102 x 272.

### Colour

White (01) | Grey / Black (74)

### Weight (Kg)

1.21

### Mounting

ceiling recessed

### Wiring

Complete with electronic control gear unit connected to the luminaire. Wiring for connecting to mains network on driver terminal board.

### Notes

Accessories available: refractor for elliptical flow distribution - interchangeable reflectors.

Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	2248	CRI (minimum):	90
W system:	30.4	Colour temperature [K]:	3000
Im source:	950	MacAdam Step:	3
W source:	8.4	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	74	Ballast losses [W]:	1.7
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	79	ZVEI Code:	LED
Beam angle [°]:	42°	Number of optical assemblies:	3


### Polar

Imax=1639 cd		CIE		Lux			
90°	180°	nL 0.79	99-100-100-100-79	h	d	Em	Emax
		UGR <10-10	DIN	2	1.5	328	410
		A.61	UTE	4	3.1	82	102
		0.79A+0.00T	F*1=991	6	4.6	36	46
		F*1+F*2=999	F*1+F*2+F*3=1000	8	6.1	21	26
		CIBSE	LG3 L<1500 cd/m² at 65°				
		UGR<10   L<1500 cd/mq @ 65°					
$\alpha = 42^\circ$							

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	61	78
1.0	74	71	68	67	70	68	68	65	82
1.5	78	75	73	72	74	73	72	70	88
2.0	80	78	77	76	77	76	75	73	93
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

# Luminance curve limit

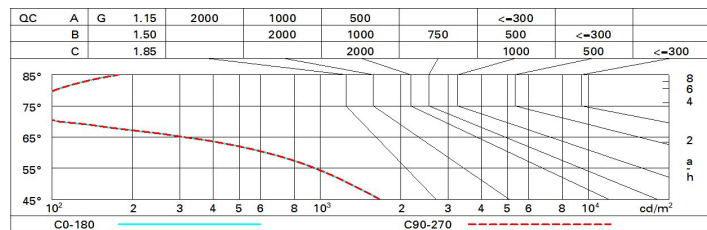

# UGR diagram

Corrected UGR values (at 950 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	3.3	3.9	3.6	4.1	4.3	3.3	3.9	3.6	4.1	4.3
	3H	3.2	3.7	3.5	4.0	4.3	3.2	3.8	3.6	4.0	4.3
	4H	3.1	3.6	3.5	3.9	4.2	3.2	3.7	3.5	4.0	4.3
	6H	3.1	3.5	3.4	3.8	4.1	3.1	3.5	3.5	3.9	4.2
	8H	3.0	3.5	3.4	3.8	4.1	3.1	3.5	3.4	3.8	4.2
	12H	3.0	3.4	3.4	3.7	4.1	3.0	3.4	3.4	3.8	4.1
4H	2H	3.2	3.7	3.5	4.0	4.3	3.1	3.6	3.5	3.9	4.2
	3H	3.1	3.5	3.4	3.8	4.2	3.1	3.5	3.4	3.8	4.2
	4H	3.0	3.3	3.4	3.7	4.1	3.0	3.3	3.4	3.7	4.1
	6H	2.9	3.2	3.3	3.6	4.0	2.9	3.2	3.3	3.6	4.0
	8H	2.9	3.2	3.3	3.6	4.0	2.9	3.1	3.3	3.6	4.0
	12H	2.8	3.1	3.3	3.5	4.0	2.8	3.1	3.3	3.5	4.0
8H	4H	2.9	3.1	3.3	3.6	4.0	2.9	3.2	3.3	3.6	4.0
	6H	2.8	3.0	3.2	3.5	3.9	2.8	3.0	3.2	3.5	3.9
	8H	2.7	2.9	3.2	3.4	3.9	2.7	2.9	3.2	3.4	3.9
	12H	2.7	2.9	3.2	3.4	3.9	2.7	2.9	3.2	3.3	3.9
12H	4H	2.8	3.1	3.3	3.5	4.0	2.8	3.1	3.3	3.5	4.0
	6H	2.7	2.9	3.2	3.4	3.9	2.7	2.9	3.2	3.4	3.9
	8H	2.7	2.9	3.2	3.3	3.9	2.7	2.9	3.2	3.4	3.9
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -4.9					5.3 / -4.9				
	1.5H	8.0 / -7.8					8.0 / -7.8				
	2.0H	9.9 / -11.8					9.9 / -11.8				