


Polare

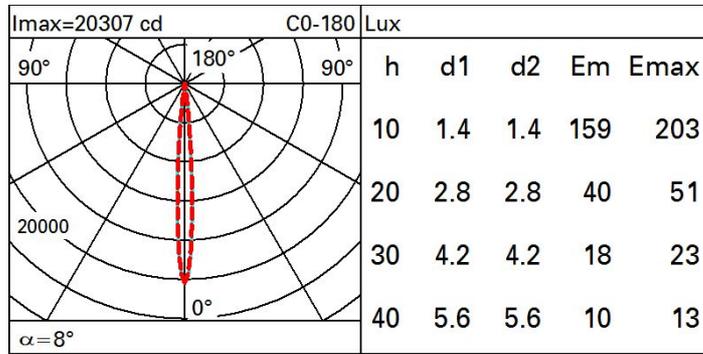

Isolux

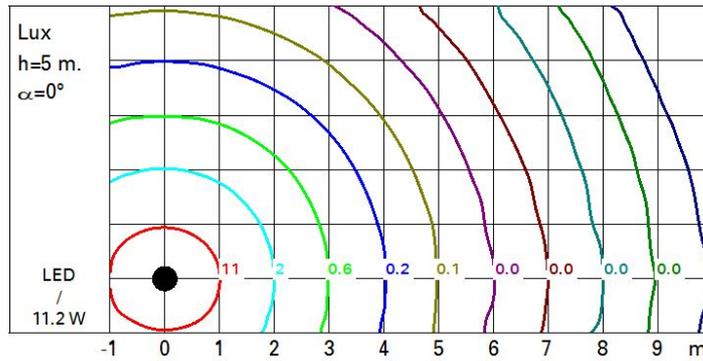


Diagramma UGR

Corrected UGR values (at 1000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-2.6	-0.6	-2.2	-0.3	0.0	-2.8	-0.8	-2.4	-0.5	-0.2
	3H	-2.6	-1.6	-2.3	-1.3	-1.0	-2.7	-1.7	-2.4	-1.4	-1.1
	4H	-2.6	-2.0	-2.3	-1.7	-1.3	-2.7	-2.0	-2.4	-1.7	-1.4
	6H	-2.7	-2.3	-2.3	-2.0	-1.6	-2.7	-2.3	-2.4	-2.0	-1.7
	8H	-2.8	-2.2	-2.4	-1.9	-1.5	-2.8	-2.2	-2.5	-1.9	-1.6
	12H	-2.9	-2.1	-2.5	-1.7	-1.4	-3.0	-2.1	-2.6	-1.8	-1.4
4H	2H	-2.5	-1.9	-2.2	-1.6	-1.2	-2.8	-2.1	-2.5	-1.8	-1.5
	3H	-2.8	-1.9	-2.4	-1.6	-1.2	-3.0	-2.1	-2.6	-1.8	-1.4
	4H	-3.1	-1.7	-2.6	-1.3	-0.8	-3.2	-1.8	-2.8	-1.4	-1.0
	6H	-3.4	-1.5	-2.9	-1.0	-0.6	-3.5	-1.7	-3.0	-1.2	-0.7
	8H	-3.5	-1.5	-3.0	-1.0	-0.5	-3.6	-1.7	-3.1	-1.2	-0.7
	12H	-3.5	-1.6	-3.0	-1.2	-0.6	-3.7	-1.8	-3.2	-1.3	-0.8
8H	4H	-3.5	-1.5	-3.0	-1.0	-0.5	-3.6	-1.7	-3.1	-1.2	-0.7
	6H	-3.4	-1.9	-2.9	-1.5	-1.0	-3.6	-2.1	-3.1	-1.6	-1.1
	8H	-3.4	-2.3	-2.8	-1.8	-1.3	-3.5	-2.5	-3.0	-2.0	-1.5
	12H	-3.2	-2.7	-2.7	-2.2	-1.7	-3.3	-2.9	-2.8	-2.4	-1.9
12H	4H	-3.5	-1.6	-3.0	-1.2	-0.6	-3.7	-1.8	-3.2	-1.3	-0.8
	6H	-3.4	-2.3	-2.8	-1.8	-1.3	-3.5	-2.5	-3.0	-2.0	-1.5
	8H	-3.2	-2.7	-2.7	-2.2	-1.7	-3.3	-2.9	-2.8	-2.4	-1.9
Variations with the observer position at spacing:											
S =	1.0H	3.1 / -3.6					3.2 / -3.9				
	1.5H	5.4 / -5.7					5.5 / -6.2				
	2.0H	7.3 / -24.7					7.4 / -33.3				