iGuzzini


Last information update: October 2024

Product configuration: BG35

BG35: Outdoor floodlight - Neutral white LED - integrated dimmable DALI power supply - Spot optic

BG35: Outdoor floodlight - Neutral white LED - integrated dimmable DALI power supply - Spot optic

10000 10000 10000 10000 10000



Technical description

Product code

Floodlight designed to use Neutral White LED lamps and lenses for spot (S) distribution. The luminaire consists of an optical assembly/component-holding box and hidden fixing bracket. The optical assembly and front frame are made of die-cast aluminium alloy coated with liquid acrylic paint (colour: RAL 9007 grey) or textured liquid paint (colour: RAL 9016 white) with a high level of resistance to weather and UV rays. The 5 mm thick tempered sodium - calcium safety glass with customised sergiraphy is joined to the frame with silicone. The frame is fastened to the optical assembly by two M5 AISI 304 stainless steel captive screws and a galvanised steel safety cable. The optical assembly contains the circuit complete with LEDs and relative PMMA plastic lenses. The component-holding box, in the rear of the luminaire, is set up to hold the control gear, which is fixed with captive screws on a galvanised steel pull-out plate. The control gear can be accessed through the rear door made of painted aluminium alloy, fixed to the product body with four M5 AISI 304 stainless steel captive screws and a safety cable. iPro can be adjusted +95°/-5° relative to the horizontal line using a bracket made of extruded aluminium, on which a graduated scale (with 15° steps) is marked using serigraphy. The internal silicone seals guarantee watertightness IP66. The luminaire is set up for pass-through wiring using two M24x15 nickel–plated brass cable glands, suitable for the entry of cables with diameter between 7 and 16 mm. The connection between the mains and the control gear is made using a 3-pole terminal block with quick-coupling system. Various accessories are available: accessory-holder frame, visor, directional flaps, glass refractors, diffusers and coloured filters which can be applied in pairs, protective grille, "L"-shade bracket for cornices. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN60598-1 standards and particular requirements.

Installation

Life Time LED 1:

Ground, wall or ceiling installation using special bracket. Secure using screw anchors for concrete, cement and solid brick.

Colour White (01) Black (04) Gre	y (15) Rust Brown (F5)	Weight (Kg) 5.65					
Mounting wall surface free standing							
Wiring							
Luminaire with DALI dimma	ble electronic power supply (220 - 24	40V ac, 50/60 Hz).					
Notes							
IK09 with protective grille.							
		Complies	with EN60598-1 and pertinent regulation				
960°C	7 IP66 C€ ∰®	8 EAL	• • • • • • • • • • • • • • • • • • •				
Technical data Im system:	3280	Life Time LED 2:	87,000h - L80 - B10 (Ta 40°C)				
W system:	31.1	Lamp code:	LED				
Im source:	4000	Number of lamps for optical					
W source:			1				
	28	assembly:	1				
	=0	assembly: ZVEI Code:	1 LED				
Luminous efficiency (Im/W, real value):	=0	,					
Luminous efficiency (Im/W,	=0	ZVEI Code: Number of optical assemblies:	LED 1				
Luminous efficiency (lm/W, real value):	=0	ZVEI Code: Number of optical	LED 1 from -25°C to 40°C.				
Luminous efficiency (Im/W, real value): Im in emergency mode: Total light flux at or above	- 0	ZVEI Code: Number of optical assemblies: Intervallo temperatura	LED 1				
Luminous efficiency (Im/W, real value): Im in emergency mode: Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.)	- 0	ZVEI Code: Number of optical assemblies: Intervallo temperatura ambiente: Power factor:	LED 1 from -25°C to 40°C. See installation instructions				
Luminous efficiency (Im/W, real value): Im in emergency mode: Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.) [%]:	105.5 - 0 82	ZVEI Code: Number of optical assemblies: Intervallo temperatura ambiente: Power factor: Inrush current: Maximum number of Iuminaires of this type per	LED 1 from -25°C to 40°C. See installation instructions 10 A / 200 μs B10A: 18 luminaires				
Luminous efficiency (Im/W, real value): Im in emergency mode: Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.) [%]: Beam angle [°]:	105.5 - 0 82 12° / 10°	ZVEI Code: Number of optical assemblies: Intervallo temperatura ambiente: Power factor: Inrush current: Maximum number of	LED 1 from -25°C to 40°C. See installation instructions 10 A / 200 μs B10A: 18 luminaires B16A: 30 luminaires				
Luminous efficiency (Im/W, real value): Im in emergency mode: Total light flux at or above an angle of 90° [Lm]: Light Output Ratio (L.O.R.) [%]: Beam angle [°]: CRI (minimum):	105.5 - 0 82 12° / 10° 80	ZVEI Code: Number of optical assemblies: Intervallo temperatura ambiente: Power factor: Inrush current: Maximum number of Iuminaires of this type per	LED 1 from -25°C to 40°C. See installation instructions 10 A / 200 μs B10A: 18 luminaires				


Minimum dimming %: Overvoltage protection:


Control

100,000h - L80 - B10 (Ta 25°C)

5kV Common mode & 4kV Differential mode

DALI-2

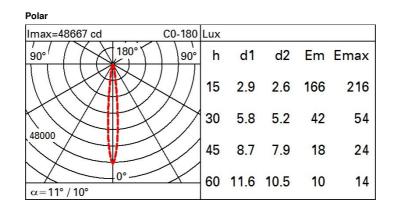

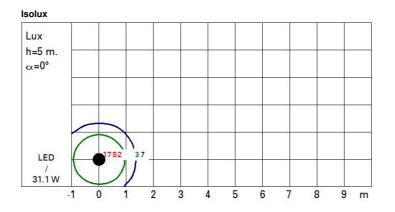

UGR diagram

Rifle	ct :										
ce il/c		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls work pl.		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
x	У	crosswise					endwise				
2H	2H	10.4	12.4	10.8	12.7	13.1	10.4	12.4	10.8	12.7	13.0
	3H	10.6	11.8	10.9	12.2	12.5	10.4	11.7	10.8	12.0	12.3
	4H	10.6	11.5	10.9	11.9	12.2	10.4	11.4	10.7	11.7	12.0
	6H	10.5	11.3	10.9	11.6	11.9	10.3	11.1	10.7	11.4	11.7
	BH	10.5	11.3	10.8	11.6	12.0	10.3	11.1	10.6	11.4	11.8
	12H	10.4	11.3	10.8	11.6	12.0	10.2	11.1	10.6	11.5	11.8
4H	2H	10.4	11.4	10.8	11.7	12.0	10.5	11.5	10.8	11.8	12.
	ЗH	10.4	11.4	10.8	11.7	12.1	10.4	11.3	10.8	11.7	12.0
	4H	10.3	11.4	10.7	11.8	12.3	10.2	11.4	10.6	11.8	12.2
	6H	10.0	11.7	10.4	12.1	12.6	9.9	11.6	10.4	12.1	12.0
	BH	9.9	11.7	10.3	12.2	12.7	9.8	11.7	10.3	12.1	12.0
	12H	8.9	11.6	10.3	12.1	12.6	9.7	11.6	10.2	12.1	12.0
вн	4H	9.8	11.7	10.3	12.2	12.7	9.8	11.7	10.3	12.1	12.0
	6H	9.8	11.4	10.3	11.9	12.4	9.7	11.4	10.3	11.8	12.4
	8H	9.8	11.1	10.4	11.6	12.1	9.8	11.1	10.3	11.5	12.1
	12H	10.0	10.7	10.5	11.2	11.8	9.9	10.7	10.5	11.2	11.7
12H	4H	9.8	11.6	10.3	12.1	12.6	9.7	11.6	10.2	12.1	12.0
	6H	9.8	11.1	10.4	11.6	12.1	9.8	11.1	10.3	11.5	12.
	8H	10.0	10.7	10.5	11.2	11.8	9.9	10.7	10.5	11.2	11.7
Varia	tions wi	th the ob	serverp	osition	at spacin	ig:					
S =	1.0H	1.8 / -2.6					2.0 / -2.5				
	1.5H	2.7 / -5.1				3.0 / -4.6					
	2.0H	4.6 / -7.9					5.0 / -7.7				