

## Billboard

Design iGuzzini

iGuzzini Bespoke

Last information update: April 2025

### Product configuration: SG18

SG18: Pole-mounted system – ASF optic – Warm White – Midnight – CRI70



### Product code

SG18: Pole-mounted system – ASF optic – Warm White – Midnight – CRI70

### Technical description

Outdoor luminaire with direct light street optic. Die-cast aluminium alloy optical assembly with steel spring and 4mm thick tempered glass. Option of  $\pm 15^\circ$  tilt adjustment in relation to the road surface. The IP rating is guaranteed by a silicone gasket. The product is supplied with an output cable L=500mm long. The product can be installed with a pole-top or lateral mounting using an attachment (to be purchased separately as an accessory). The component assembly is opened thanks to a hinge, so it is tool-free. The product is equipped with a power supply featuring Midnight protocol. All external screws are made of stainless steel.

### Installation

The product can be installed with a pole-top or lateral mounting using an attachment ( $\varnothing 60\text{mm}$  or  $\varnothing 76\text{mm}$ ) to be purchased separately as an accessory. Two adapters for  $\varnothing 42\text{mm}$  or  $\varnothing 46\text{mm}$  poles are also available as accessories.

### Colour

Grey (RAL 7010) (U9)

### Weight (Kg)

2.72

### Mounting


pole-top

Complies with EN60598-1 and pertinent regulations



IK10


IP66




### Technical data

lm system:	2860	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W system:	17.6	Voltage [Vin]:	230
lm source:	-	Lamp code:	LED
W source:	-	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	162.5	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -40°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	100	Power factor:	See installation instructions
CRI (minimum):	70	Inrush current:	24.88 A / 236 µs
Colour temperature [K]:	3000	Minimum dimming %:	5
MacAdam Step:	5	Overvoltage protection:	10kV Common mode & 10kV Differential mode
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)	Control:	Middle of the night

### Polar

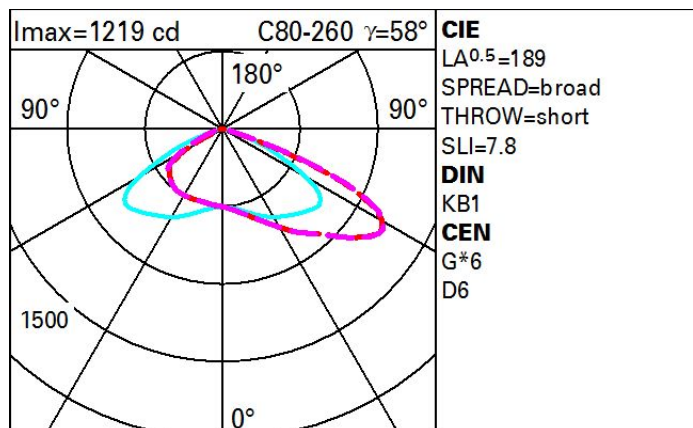

# Isolux

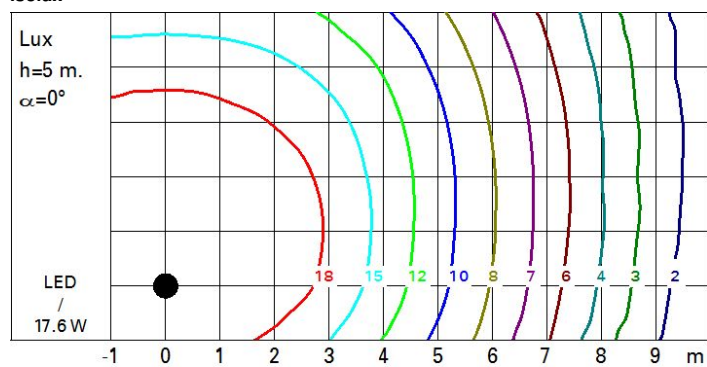

# Utilisation factors

