

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: PH70

PH70: Frame adjustable 10-cell recessed luminaire - LED - Neutral White - DALI dimmable power supply - Medium

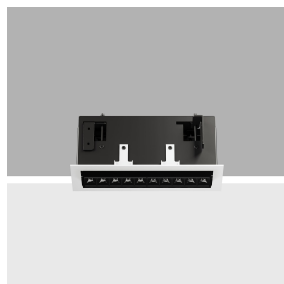

Product code

PH70: Frame adjustable 10-cell recessed luminaire - LED - Neutral White - DALI dimmable power supply - Medium

Technical description

Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The 10 lighting cells linear body, in die-cast aluminium, can be used to direct the emission with a tilting adjustability of +/- 30°. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled luminance. Supplied with DALI dimmable power supply connected to the luminaire.

Installation

recessed with mechanical blocking system for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal)

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

0.97

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

On power supply box: screw connections.

Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1525	CRI (minimum):	90
W system:	16.5	Colour temperature [K]:	4000
lm source:	1860	MacAdam Step:	3
W source:	14	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	92.4	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	1
Beam angle [°]:	22°	Control:	DALI-2


Polar

	CIE			
	nL 0.82			
	100-100-100-100-82			
	UGR 10.3-10.3			
	DIN A.61			
	UTE			
	0.82A+0.00T			
	F*1=999			
	F*1+F*2=1000			
	F*1+F*2+F*3=1000			
	CIBSE			
	LG3 L<1500 cd/m² at 65°			
	UGR<16 L<1500 cd/mq @65°			
	Lux			
	h	d	Em	Emax
	2	0.8	1303	1647
	4	1.6	326	412
	6	2.3	145	183
	8	3.1	81	103

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	66	70	67	67	64	78
1.0	77	74	72	70	73	71	71	68	83
1.5	81	79	77	75	78	76	75	73	89
2.0	84	82	80	79	81	79	78	76	93
2.5	85	84	83	82	83	82	81	79	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	81	99
5.0	88	87	87	87	86	85	84	82	100

Luminance curve limit

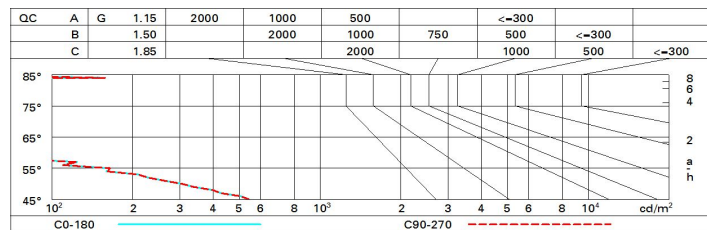

UGR diagram

Corrected UGR values (at 1860 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	11.2	13.3	11.6	13.6	13.9	11.2	13.3	11.6	13.6	13.9
	3H	11.1	12.6	11.4	13.0	13.3	11.1	12.6	11.4	13.0	13.3
	4H	11.0	12.4	11.4	12.7	13.0	11.0	12.4	11.4	12.7	13.0
	6H	10.9	12.1	11.3	12.4	12.8	10.9	12.1	11.3	12.4	12.8
	8H	10.9	12.0	11.3	12.4	12.7	10.9	12.0	11.3	12.4	12.7
	12H	10.8	11.9	11.2	12.3	12.7	10.8	11.9	11.2	12.3	12.7
4H	2H	11.0	12.4	11.4	12.7	13.0	11.0	12.4	11.4	12.7	13.0
	3H	10.8	11.9	11.2	12.3	12.7	10.8	11.9	11.2	12.3	12.7
	4H	10.7	11.8	11.1	12.2	12.6	10.7	11.8	11.1	12.2	12.6
	6H	10.4	12.0	10.9	12.5	12.9	10.4	12.0	10.9	12.5	12.9
	8H	10.3	12.1	10.8	12.5	13.0	10.3	12.1	10.8	12.5	13.0
	12H	10.1	12.1	10.7	12.5	13.1	10.1	12.1	10.7	12.5	13.1
8H	4H	10.3	12.1	10.8	12.5	13.0	10.3	12.1	10.8	12.5	13.0
	6H	10.1	11.9	10.6	12.4	12.9	10.1	11.9	10.6	12.4	12.9
	8H	10.1	11.7	10.6	12.2	12.7	10.1	11.7	10.6	12.2	12.7
	12H	10.3	11.2	10.8	11.7	12.3	10.3	11.2	10.8	11.7	12.3
12H	4H	10.1	12.1	10.7	12.5	13.1	10.1	12.1	10.7	12.5	13.1
	6H	10.1	11.7	10.6	12.2	12.7	10.1	11.7	10.6	12.2	12.7
	8H	10.3	11.2	10.8	11.7	12.3	10.3	11.2	10.8	11.7	12.3
Variations with the observer position at spacing:											
S =	1.0H	6.8 / -28.7					6.8 / -28.7				
	1.5H	9.6 / -30.9					9.6 / -30.9				
	2.0H	11.6 / -33.1					11.6 / -33.1				